



CATALOGO SINTESI

**TUBI E PRODOTTI
IN ACCIAIO INOX**





PRODOTTI

TUBI SALDATI TIG/LASER - ISO

EN 10217-7- EN ISO 1127

A RICHIESTA DISPONIBILI IN:
 DUPLEX, SUPERDUPLEX, SUPERAUSTENITICI



DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
17,2	2,00	0,761
17,2	2,50	0,950
21,3	1,50	0,744
21,3	2,00	0,967
21,3	2,50	1,177
21,3	3,00	1,375
26,9	1,20	0,772
26,9	1,50	0,954
26,9	2,00	1,247
26,9	3,00	1,795
33,7	1,50	1,209
33,7	2,00	1,588
33,7	2,50	1,953
33,7	3,00	2,306
42,4	1,50	1,536
42,4	2,00	2,023
42,4	2,50	2,498
42,4	3,00	2,960
48,3	1,20	1,415
48,3	1,50	1,758
48,3	2,00	2,319
48,3	3,00	3,403
48,3	4,00	4,437
60,3	1,20	1,776
60,3	1,50	2,209
60,3	2,00	2,920
60,3	2,50	3,618
60,3	3,00	4,304
60,3	4,00	6,124
76,1	1,50	2,802
76,1	2,00	3,711
76,1	2,50	4,607
76,1	3,00	5,491
76,1	4,00	7,222
88,9	1,50	3,283
88,9	2,00	4,352
88,9	2,50	5,409
88,9	3,00	6,453
88,9	4,00	8,504



DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
101,6	1,50	3,760
101,6	2,00	4,988
101,6	3,00	7,407
114,3	2,00	5,624
114,3	2,50	6,999
114,3	3,00	8,361
114,3	4,00	11,048
139,7	2,00	6,896
139,7	3,00	10,269
139,7	4,00	13,592
168,3	2,00	8,328
168,3	3,00	12,417
168,3	4,00	16,456
219,1	2,00	10,872
219,1	2,50	13,559
219,1	3,00	16,233
219,1	4,00	21,544
273	2,00	13,572
273	3,00	20,282
273	4,00	26,943
323,9	2,00	16,121
323,9	3,00	24,106
323,9	4,00	32,041
355,6	3,00	26,487
355,6	4,00	35,216
406,4	3,00	30,303
406,4	4,00	40,304
406,4	6,00	60,160
457	3,00	34,104
457	4,00	45,372
508	3,00	37,936
508	4,00	50,481
610	3,00	45,598
610	4,00	60,697
711	4,00	70,700
813	4,00	81,000
914	4,00	91,000
1016	4,00	101,000

PRODOTTI

TUBI SALDATI TIG/LASER - METRICO

EN 10217-7- EN ISO 1127

A RICHIESTA DISPONIBILI IN:
 DUPLEX, SUPERDUPLEX, SUPERAUSTENITICI




DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
8	0,50	0,088
8	1,00	0,175
10	0,50	0,113
10	1,00	0,225
10	1,50	0,319
12	1,00	0,275
12	1,50	0,394
14	1,00	0,326
14	1,50	0,470
14	2,00	0,601
15	1,00	0,351
16	1,00	0,376
16	1,20	0,445
16	1,50	0,545
16	2,00	0,701
18	1,00	0,426
18	1,50	0,620
18	2,00	0,801
20	1,00	0,476
20	1,50	0,695
20	2,00	0,901
22	1,20	0,625
22	1,50	0,770
22	2,00	1,002
25	1,00	0,601
25	1,20	0,715
25	1,50	0,883
25	2,00	1,152
28	1,00	0,676
28	1,50	0,995
28	2,00	1,302
30	1,00	0,726
30	1,20	0,865
30	1,50	1,070
30	2,00	1,402
32	1,00	0,776
32	1,20	0,925
32	1,50	1,146
32	2,00	1,502
35	1,00	0,851
35	1,20	1,016
35	1,50	1,258
38	1,00	0,926
38	1,20	1,106
40	1,00	0,977
40	1,20	1,166
40	1,50	1,446

DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
40	2,00	1,903
50	1,00	1,227
50	1,20	1,466
50	1,50	1,822
50	2,00	2,404
50	3,00	3,531
52	1,00	1,277
52	1,50	1,897
52	2,00	2,504
54	1,00	1,327
54	1,50	1,972
54	2,00	2,604
63,5	1,50	2,329
70	1,50	2,573
70	2,00	3,405
70	3,00	5,033
80	1,50	2,948
80	2,00	3,906
84	2,00	4,107
104	2,00	5,108
129	2,00	6,360
129	3,00	9,465
154	2,00	7,612
156	3,00	11,343
159	3,00	11,719
204	2,00	10,116
206	3,00	15,249
254	2,00	12,620
255	2,50	15,810
256	3,00	19,005
304	2,00	15,124
305	2,50	18,940
306	3,00	22,761
354	2,00	17,630
356	3,00	5,108
406	3,00	6,360
406	4,00	40,304
406	6,00	60,160
408	4,00	9,465
456	3,00	7,612
458	4,00	11,343
506	3,00	10,116
508	4,00	15,249
606	3,00	12,620
608	4,00	19,005
708	4,00	15,124
808	4,00	22,761

PRODOTTI

TUBI SALDATI TIG/LASER - ANSI ASTM A312/A312M - ASME SA312

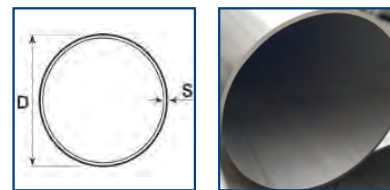


DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
21,30	1,60	0,795
21,30	1,65	0,814
21,30	2,11	1,017
21,30	2,77	1,289
26,70	1,65	1,038
26,70	2,11	1,303
26,70	2,87	1,718
33,40	1,65	1,316
33,70	2,00	1,593
33,40	2,77	2,131
33,40	3,38	2,549
42,20	1,65	1,681
42,20	2,77	2,744
42,20	3,56	3,455
42,40	2,00	2,023
48,30	1,65	1,934
48,30	2,00	2,326
48,30	2,77	3,168
48,30	3,68	4,125
60,30	1,65	2,431
60,30	2,00	2,929
60,30	2,77	4,003
60,30	3,91	5,539
73,03	2,11	3,759
73,03	3,05	5,362
73,03	5,16	8,760
88,90	2,11	4,600
88,90	3,05	6,577
88,90	5,49	11,503
101,60	2,11	5,273

DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
101,60	3,05	7,551
114,30	2,11	5,946
114,30	3,05	8,524
114,30	6,02	16,323
141,30	2,77	9,639
141,30	3,40	11,778
168,30	2,77	11,518
168,30	3,40	14,084
168,30	7,11	28,789
219,10	2,77	15,053
219,10	3,76	20,339
219,10	6,35	33,830
219,10	8,18	43,340
273,00	3,40	23,026
273,00	4,19	28,293
273,00	6,35	42,400
273,00	9,27	61,210
323,90	3,96	31,826
323,90	4,57	36,659
323,90	6,35	36,659
355,60	3,96	34,868
355,60	4,78	41,990
355,60	6,35	55,532
355,60	7,92	68,951
355,60	9,53	82,583
355,60	12,70	109,045
406,40	4,19	42,199
406,40	4,78	48,070
406,40	6,35	63,610

PRODOTTI

TUBI SENZA SALDATURA - ANSI

ASTM A312/A312M - ASME SA312

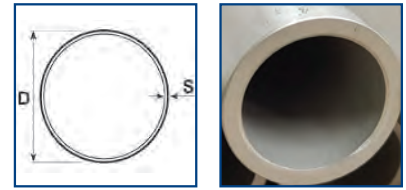


DIAM. EST. (mm)	SPESSORE (mm)	SPESSORE (Pollici/Inches)	SCHED.	PESO (kg/mt)
13,72	1,65	1/4	10S	0,499
13,72	2,24	1/4	40S	0,644
13,72	3,02	1/4	80S	0,809
17,15	1,65	3/8	10S	0,640
17,15	2,31	3/8	40S	0,858
17,15	3,20	3/8	80S	1,118
21,34	2,11	1/2	10S	1,016
21,34	2,77	1/2	40S	1,288
21,34	3,73	1/2	80S	1,645
21,34	4,78	1/2	160S	1,980
26,67	2,11	3/4	10S	1,298
26,67	2,87	3/4	40S	1,710
26,67	3,91	3/4	80S	2,228
26,67	5,56	3/4	160S	2,940
33,40	2,77	1	10S	2,125
33,40	3,38	1	40S	2,541
33,40	4,55	1	80S	3,287
33,40	6,35	1	160S	4,300
42,16	2,77	1 1/4	10S	2,732
42,16	3,56	1 1/4	40S	3,441
42,16	4,85	1 1/4	80S	4,531
42,16	6,35	1 1/4	160S	5,690
48,26	2,77	1 1/2	10S	3,155
48,26	3,68	1 1/2	40S	4,108
48,26	5,08	1 1/2	80S	5,493
48,26	7,14	1 1/2	160S	7,350
60,33	2,77	2	10S	3,992
60,33	3,91	2	40S	5,524
60,33	5,54	2	80S	7,601
60,33	8,74	2	160S	11,290
73,03	3,05	2 1/2	10S	5,345
73,03	5,16	2 1/2	40S	8,769
73,03	7,01	2 1/2	80S	11,589
73,03	9,52	2 1/2	160S	15,150
88,90	3,05	3	10S	6,557
88,90	5,49	3	40S	11,466
88,90	7,62	3	80S	15,509
88,90	11,13	3	160S	21,670
101,60	3,05	3 1/2	10S	7,526
101,60	5,74	3 1/2	40S	13,778
101,60	8,08	3 1/2	80S	18,921
114,30	3,05	4	10S	8,496

PRODOTTI

DIAM. EST. (mm)	SPESSORE (mm)	SPESSORE (Inches)	SCHED.	PESO (kg/mt)
114,30	6,02	4	40S	16,322
114,30	8,56	4	80S	22,665
141,30	3,40	5	10S	11,740
141,30	6,55	5	40S	22,101
141,30	9,52	5	80S	31,414
168,30	3,40	6	10S	14,039
168,30	7,11	6	40S	28,697
168,30	10,97	6	80S	43,217
219,10	3,76	8	10S	20,274
219,10	8,18	8	40S	43,202
219,10	12,70	8	80S	65,637
273,10	4,19	10	10S	28,310
273,10	9,27	10	40S	61,440
273,10	12,70	10	80S	83,000
323,90	4,57	12	10S	36,680
323,90	9,52	12	40S	75,240
323,90	12,70	12	80S	99,310

TUBI SENZA SALDATURA - METRICI

ASTM A213




DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)	1.4301/1.4307
6,00	1,00	0,125	
8,00	1,00	0,175	
8,00	1,50	0,244	
8,00	2,00	0,300	
10,00	1,00	0,225	
10,00	1,50	0,319	
10,00	2,00	0,401	
12,00	1,00	0,275	
12,00	1,50	0,394	
12,00	2,00	0,501	
14,00	1,00	0,326	
14,00	1,50	0,470	

DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
14,00	2,00	0,601
15,00	2,00	0,651
16,00	1,00	0,376
16,00	1,50	0,545
16,00	2,00	0,701
18,00	1,00	0,426
18,00	1,50	0,620
18,00	2,00	0,801
20,00	1,00	0,476
20,00	1,50	0,695
20,00	2,00	0,901

PRODOTTI

TUBI A SEZIONE QUADRA SALDATI - HF

EN 10219-2 / ASTM 554

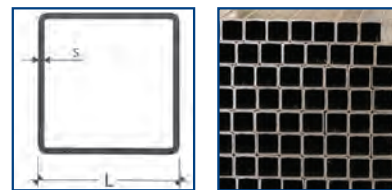


DIM. LATO (mm)	SPESS. (mm)	PESO (kg/mt)
10	1,00	0,293
12	1,50	0,518
15	1,20	0,538
15	1,50	0,661
20	1,00	0,613
20	1,20	0,729
20	1,50	0,901
20	2,00	1,176
25	1,00	0,772
25	1,20	0,921
25	1,50	1,140
25	2,00	1,495
30	1,00	0,932
30	1,20	1,112
30	1,50	1,379
30	2,00	1,814
30	3,00	2,645
35	1,20	1,304
35	1,50	1,618
35	2,00	2,133
40	1,00	1,251
40	1,20	1,495
40	1,50	1,858
40	2,00	2,452
40	2,50	3,033

DIM. LATO (mm)	SPESS. (mm)	PESO (kg/mt)
40	3,00	3,602
40	4,00	4,703
45	1,50	2,097
50	1,20	1,878
50	1,50	2,336
50	2,00	3,090
50	3,00	4,559
50	4,00	5,979
60	1,50	2,814
60	2,00	3,728
60	3,00	5,516
60	4,00	7,255
70	3,00	6,473
80	2,00	5,004
80	3,00	7,430
80	4,00	9,807
80	5,00	12,133
100	2,00	6,279
100	3,00	9,344
100	4,00	12,359
100	5,00	15,323
120	2,00	7,555
120	3,00	11,258
120	4,00	14,910
140	3,00	13,172
140	4,00	17,462
150	4,00	18,738

PRODOTTI

TUBI A SEZ. RETTANGOLARE SALDATI - HF EN 10219-2 / ASTM 554



DIM. LATI (mm)	SPESS. (mm)	PESO (kg/mt)
20 x 10	1,00	0,453
20 x 10	1,20	0,538
20 x 10	1,50	0,661
20 x 15	1,20	0,729
20 x 15	1,50	0,781
25 x 15	1,50	0,901
25 x 15	2,00	1,176
30 x 10	1,00	0,613
30 x 10	1,20	0,729
30 x 10	1,50	0,901
30 x 15	1,00	0,693
30 x 15	1,20	0,825
30 x 15	1,50	1,020
30 x 15	2,00	1,335
30 x 20	1,00	0,772
30 x 20	1,20	0,921
30 x 20	1,50	1,140
30 x 20	2,00	1,495
35 x 20	1,50	1,259
40 x 15	1,20	1,017
40 x 15	1,50	1,259
40 x 20	1,00	0,932
40 x 20	1,20	1,112
40 x 20	1,50	1,379
40 x 20	2,00	1,814
40 x 20	3,00	2,645
40 x 30	1,50	1,618
40 x 30	2,00	2,133
40 x 30	3,00	3,124
50 x 20	1,00	1,091
50 x 20	1,20	1,304
50 x 20	1,50	1,618
50 x 20	2,00	2,133
50 x 25	1,20	1,399
50 x 25	1,50	1,738
50 x 25	2,00	2,292
50 x 30	1,20	1,495
50 x 30	1,50	1,858
50 x 30	2,00	2,452
50 x 30	3,00	3,602
50 x 40	1,50	2,097
60 x 20	1,20	1,495
60 x 20	1,50	1,858
60 x 20	2,00	2,452

DIM. LATI (mm)	SPESS. (mm)	PESO (kg/mt)
60 x 30	1,20	1,686
60 x 30	1,50	2,097
60 x 30	2,00	2,771
60 x 30	3,00	4,081
60 x 40	1,50	2,336
60 x 40	2,00	3,090
60 x 40	2,50	3,831
60 x 40	3,00	4,559
80 x 40	1,50	2,814
80 x 40	2,00	3,728
80 x 40	3,00	5,516
80 x 40	4,00	7,255
80 x 60	2,00	4,366
80 x 60	3,00	6,473
80 x 60	4,00	8,531
100 x 40	2,00	4,366
100 x 40	3,00	6,473
100 x 40	4,00	8,531
100 x 50	2,00	4,685
100 x 50	3,00	6,952
100 x 50	4,00	9,169
100 x 60	2,00	5,004
100 x 60	3,00	7,430
100 x 60	4,00	9,807
100 x 60	5,00	12,133
100 x 80	3,00	8,387
120 x 40	2,00	5,004
120 x 40	3,00	7,430
120 x 40	4,00	9,807
120 x 60	2,00	5,641
120 x 60	3,00	8,387
120 x 60	4,00	11,083
120 x 80	2,00	6,279
120 x 80	3,00	9,344
120 x 80	4,00	12,359
140 x 60	4,00	12,359
150 x 50	2,00	6,279
150 x 50	3,00	9,344
150 x 50	4,00	12,359
150 x 100	2,00	7,874
150 x 100	3,00	11,736
150 x 100	4,00	15,548
160 x 80	3,00	11,258

PRODOTTI

ANGOLARI LAMINATI

L = 6000mm

EN 10088-3




DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
20,0 x 20,0	3,0	0,89
25,0 x 25,0	3,0	1,12
30,0 x 30,0	3,0	1,36
30,0 x 30,0	4,0	1,78
35,0 x 35,0	4,0	2,10
40,0 x 40,0	3,0	2,03

DIAM. EST. (mm)	SPESS. (mm)	PESO (kg/mt)
40,0 x 40,0	4,0	2,42
40,0 x 40,0	5,0	2,97
50,0 x 50,0	5,0	3,77
60,0 x 60,0	6,0	5,42
80,0 x 80,0	8,0	9,66
100,0 x 100,0	10,0	15,00

BARRA PIATTA CESOIATA

L = 4000mm o 6000mm

EN 10028-7 - EN 10088-2 / ASTM A240 - ASME SA240



DIM. (mm)	SPESS. (mm)	PESO (kg/mt)
10	3,00	0,24
12	3,00	0,28
15	3,00	0,36
15	4,00	0,48
15	5,00	0,60
20	3,00	0,48

DIM. (mm)	SPESS. (mm)	PESO (kg/mt)
20	4,00	0,64
20	5,00	0,80
20	6,00	0,96
20	8,00	1,28
20	10,00	1,60
25	3,00	0,60

BARRA TONDA TRAFILATA

L = 3000mm o 6000mm

EN 10088-3



DIAM. (mm)	PESO (kg/mt)
3	0,057
4	0,100
5	0,157
6	0,226
7	0,308
8	0,402
9	0,509
10	0,628
11	0,760
12	0,904
14	1,231
15	1,413
16	1,608



DIAM. (mm)	PESO (kg/mt)
18	2,035
19	2,231
20	2,512
22	3,040
25	3,925
28	4,924
30	5,652
32	6,431
35	7,693
38	9,068
40	10,048
45	12,717
50	15,700

PRODOTTI

BARRA FORATA

EN 10216-5

*Si effettua servizio di taglio a misura



DIAM. EST. (mm)	DIAM. INT. (mm)	PESO (kg/mt)
32	16	5,11
32	20	4,23
36	16	6,84
36	20	5,96
36	25	4,58
40	20	7,89
40	25	6,51
40	28	5,53
45	20	10,60
45	32	6,75
50	25	12,20
50	32	9,75
50	36	8,08
56	28	15,30
56	36	12,10
56	40	10,30
63	32	19,10
63	40	15,60
63	50	10,00
71	36	24,30
71	40	22,40
71	45	19,80
71	56	13,00
75	40	26,20
80	40	31,10
80	45	28,50
80	50	25,50
80	63	16,50
85	45	33,70
90	50	36,40
90	56	32,50
90	63	27,40
90	71	20,80
95	50	42,30

DIAM. EST. (mm)	DIAM. INT. (mm)	PESO (kg/mt)
100	56	44,60
100	63	39,50
100	71	32,90
100	80	24,60
106	56	52,50
106	80	32,50
112	63	58,80
112	80	49,20
112	90	40,80
118	63	64,60
118	71	57,90
118	90	39,20
125	71	68,90
125	80	60,50
125	90	50,10
125	100	38,40
132	80	72,00
132	90	61,60
132	106	42,30
140	80	85,90
140	100	63,80
140	112	48,20
150	80	104,40
150	95	88,30
150	106	74,70
150	125	47,80
160	112	86,50
160	122	72,10
160	132	56,60
170	140	64,30
180	150	68,90
190	160	73,50
212	170	109,70
250	200	153,70

LE PRINCIPALI LEGHE DELL'ACCIAIO INOSSIDABILE

Leghe standard

Outokumpu	EN	ASTM	Typical		Minimum		Others	SS	DIN	Stock standard Pipe/Fittings
			C	Cr	Ni	Mo				
4301	1.4301	(304)	0.04	17.0	8.5	-		2333	1.4301	
4307	1.4307	304L	0.02	18.0	8.0	-		(2352)	(1.4306)	ANSI/ISO/Metric
4541	1.4541	321	0.04	17.0	9.0	-	Ti	2337	1.4541	ISO
4306	1.4306	304L	0.02	18.0	10.0	-		2352	1.4306	
4401	1.4401	316	0.04	16.5	10.0	2.0		(2347)	(1.4401)	
4404	1.4404	316L	0.02	16.5	10.0	2.0		(2348)	(1.4404)	ANSI/ISO/Metric
4571	1.4571	316Ti	0.04	16.5	10.5	2.0	Ti	2350	1.4571	ISO/Metric
4436	1.4436	316	0.04	16.5	10.5	2.5		2343	(1.4436)	
4432	1.4432	316L	0.02	16.5	10.5	2.5		2343	(1.4435)	ISO/Metric
4435	1.4435	316L	0.02	17.0	12.5	2.5		2353	1.4435	
4438	1.4438	317L	0.02	18.0	13.0	3.0		2367	1.4438	

Leghe "speciali" per proprietà meccaniche e/o migliorata resistenza alla corrosione

Outokumpu	EN	ASTM	C	Cr	Typical			Other	SS	DIN	Stockpipe
					Ni	Mo	N				
Duplex											
LDX 2101®	1.4162	S32101	0.03	21.5	1.5	0.3	0.22	5,5 Mn	-		Duralite™
2304	1.4362	S32304	0.02	23.0	4.8	0.3	0.10		2327	1.4362	
LDX 2404™	1.4662	S82441	0.02	24.0	3.6	1.6	0.27	3 Mn			
2205	1.4462	S32205	0.02	22.0	5.7	3.1	0.17		2377	1.4462	ANSI
2507	1.4410	S32750	0.02	25.0	7.0	4.0	0.27		2328	-	
Austenitic											
904L	1.4539	N08904	0.01	20.0	25.0	4.3	0.06		2562	1.4539	
254 SMO®	1.4547	S31254	0.01	20.0	18.0	6.1	0.20		2378	-	ANSI
654 SMO®	1.4652	S32654	0.01	24.0	22.0	7.3	0.50	3 Mn, Cu		-	

Leghe "speciali" per resistenza alle alte temperature

Outokumpu	EN	ASTM	C	Cr	Typical			N	SS	DIN
					Ni	Si				
4948	1.4948	304H	0.05	18.1	8.3	-	0.06	2333	1.4948	
4878	1.4878	321	0.05	17.3	9.1	-	0.01	2337	1.4878	
153 MA™	1.4818	S30415	0.05	18.5	9.5	1.3	0.15	2372	-	
253 MA®	1.4835	S30815	0.09	21.0	11.0	1.6	0.17	2368	-	
4828	1.4828	-	0.04	20.0	12.0	2.0	0.04	-	1.4828	
4833	1.4833	309S	0.06	22.3	12.6	-	0.08	-	1.4833	
4845	1.4845	310S	0.05	25.0	20.0	-	0.04	2361	1.4845	

DN	OUTSIDE DIAMETER [mm]				ASTM THICKNESSES [mm]					ELBOWS RADIUS [mm]		
	ISO	Metric (depends on thickness)	ASTM Inches / mm		SCHED. 5S	SCHED. 10S	SCHED. 40S	SCHED. 80S	SCHED. 160S	ISO-Elbows 3D (R = 1.5xD)	Metric-Elbows (R = 1.5xD)	Elbows (R = ID + 100)
DN10	17,2	10	3/8"	17,15		1,65	2,31	3,2				
DN15	21,3	18/20	1/2"	21,34	1,65	2,11	2,77	3,73	4,78	27,5	22,5/25	
DN20	26,9	22/23/25	3/4"	26,7	1,65	2,11	2,87	3,91	5,56	28,5	25/27,5	
DN25	33,7	28/30/32/33	1"	33,4	1,65	2,77	3,38	4,55	6,35	38	32,5/33,5	
DN32	42,4	35/38/40	1 1/4"	42,16	1,65	2,77	3,56	4,85	6,35	47,5	45	
DN40	48,3	43/44,5/50	1 1/2"	48,26	1,65	2,77	3,68	5,08	7,14	57	47,5/51	
DN50	60,3	51/53/54/57	2"	60,3	1,65	2,77	3,91	5,54	8,74	76	72,5/70	
DN65	76,1	63,5-70	2 1/2"	73,03	2,11	3,05	5,16	7,01	9,52	95	95	
DN80	88,9	83-86	3"	88,9	2,11	3,05	5,49	7,62	11,13	114	123	180
DN90	101,6	103-108	3 1/2"	101,6	2,11	3,05	5,74	8,08		152		
DN100	114,3	103-108	4"	114,3	2,11	3,05	6,02	8,56	13,49	152	150	200
DN125	139,7	128-133	5"	141,3	2,77	3,4	6,55	9,52	15,8	190	188	225
DN150	168,3	153-159	6"	168,3	2,77	3,4	7,11	10,97	18,26	229	225	250
DN200	219,1	203-208	8"	219,1	2,77	3,76	8,18	12,7	23,01	305	300	300
DN250	273	253-258	10"	273,1	3,4	4,19	9,27	12,7	28,58	381	375	350
DN300	323,9	304-310	12"	323,9	3,96	4,57	9,52	12,7	33,32	457	450	400
DN350	355,6	354/358	14"	355,6	3,96	4,78	9,52	12,7	35,7	533	525	450
DN400	406,4	406/408	16"	406,4	4,19	4,78	9,52	12,7	40,49	610	600	500
DN450	457	456/458	18"	457,2	4,19	4,78	9,52	12,7	45,24	686	675	550
DN500	508	506/508	20"	508	4,78	5,54	9,52	12,7	50,01	762	750	600
DN550			22"	558,8	4,78	5,54	9,52	12,7	53,98			
DN600	610	606/610	24"	609,6	5,54	6,35	9,52	12,7	59,64	914	900	700
DN650			26"	660,4			9,52	12,7				
DN700	711	706/708	28"	711,2			9,52	12,7		1067	1050	800
DN750			30"	762	6,35	7,92	9,52	12,7				
DN800	813	808	32"	812,8			9,52	12,7		1219	1200	900
DN900	914		36"	914,4			9,52	12,7		1372	1350	1000
DN1000	1016		40"	1016			9,52	12,7		1524	1500	1100

INOX TEAM s.r.l.



20020 Solaro (MI) - VIA Como , 61

commercialeuni-val@inoxteam.it

